

program summary

DKM-ball valves


technical details:

- NPS 1/2" - 16"
- pressure: 10⁻⁴ Torr- PN 450
- temp.: -200 bis +600 °C
- flange connection: DIN, BS, ANSI
- drive connection: DIN, ISO 5211 T1
- face to face: DIN, BS, ANSI

terms of delivery:


- available with: worm gear drives, electr. actuating drive, pneum. drive and all fittings

型号: 11 00-12 00 两通球阀、滚球轴承、安全进料箱

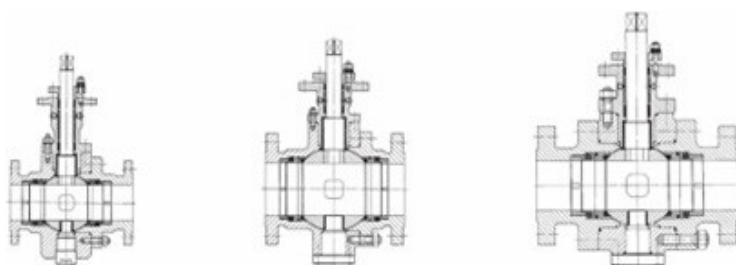


直径 DN	mm	15-400
	inch	1/2-16
公称压力 PN	Bar	16-250
	Class	150-1500
温度	°C	-200~600
	°F	-328~1112
baulange		DIN 3202
face to face		ANSI B 16.10

型号: 17 00-18 00 两通球阀、顶端注入、安全进料箱

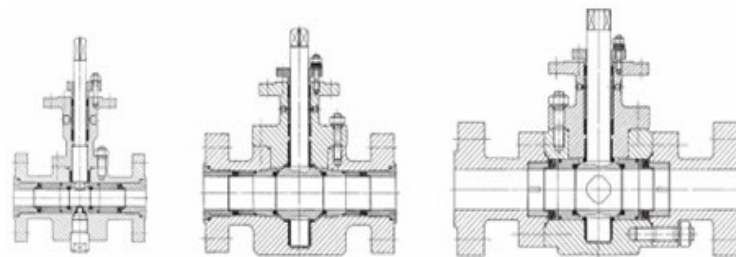


直径 DN	mm	15-200
	inch	1/2-10
公称压力 PN	Bar	63-400
	Class	400-2500
温度	°C	-200~600
	°F	-328~1112
baulange		DIN 3202
face to face		ANSI B 16.10

型号: 21 00-22 00 控制球阀、“转换球里的控制线”

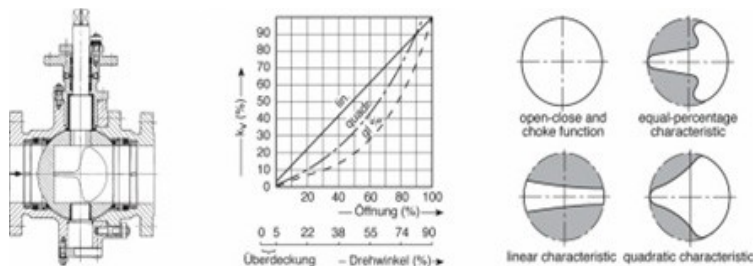


直径 DN	mm	15-400
	inch	1/2-16
公称压力 PN	Bar	10-160
	Class	150-900
温度	°C	-200~600
	°F	-328~1112
baulange		DIN 3202
face to face		ANSI B 16.10

型号: 30 00 介质成颗粒状球阀、“无死空间”

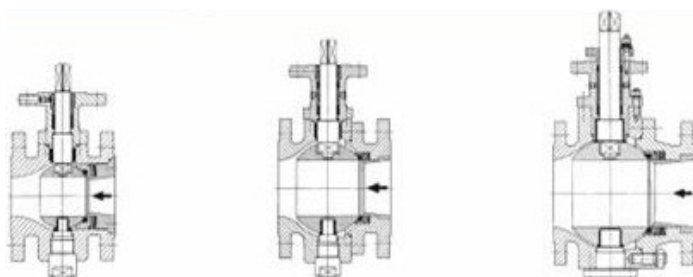

直径 DN	mm	25-300
	inch	1-12
公称压力 PN	Bar	16-40
	Class	150-300
温度	°C	-50~600
	°F	-58~1112
baulange		DIN 3202
face to face		ANSI B 16.10

型号: 40 00 底部带出口球阀、“倾斜转换轴”

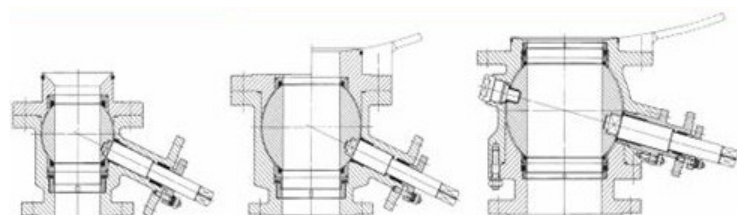

直径 DN	mm	25-300
	inch	1-12
公称压力 PN	Bar	16-40
	Class	150-300
温度	°C	-50~600
	°F	-58~1112
baulange		DIN 3202
face to face		ANSI B 16.10

program summary

DKM-multiway ball valves


terms of delivery:

• available with: worm gear drives, electr. actuating drive, pneum. drive and all fittings

quality-assurance:


• DGRL 97/23 EG
certificate of material in accordance with EN 10204-3.1.B
all final acceptance tests desired can be carried out.

型号: 50 00-55 00 三通转向球阀

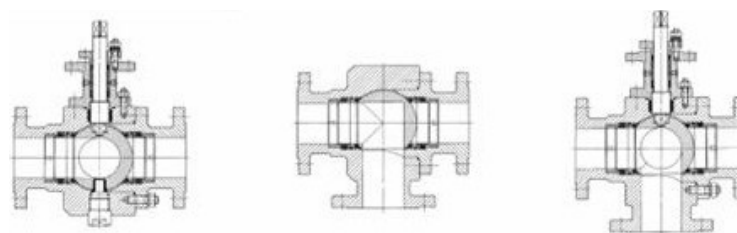


直径 DN	mm	15-200
	inch	1/2-8
公称压力 PN	Bar	16-100
	Class	150-600
温度	°C	-200~600
	°F	-328~1112
baulange		DIN 3202
face to face		ANSI B 16.10

型号: 60 00 多通球阀、>有重叠<

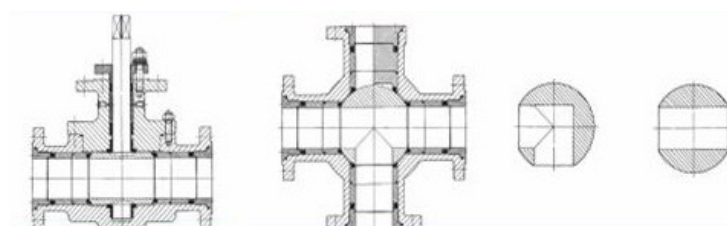


直径 DN	mm	15-200
	inch	1/2-8
公称压力 PN	Bar	16-400
	Class	150-2500
温度	°C	-200~600
	°F	-328~1112
baulange		DIN 3202
face to face		ANSI B 16.10

型号: 70 00 多通球阀、>无重叠<

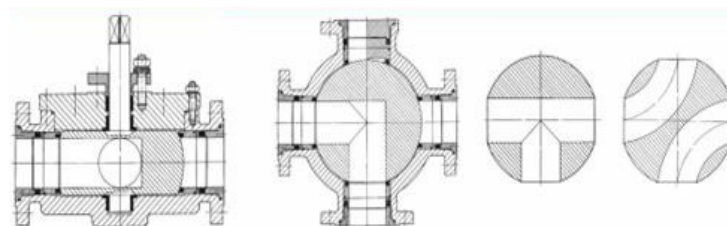


直径 DN	mm	15-100
	inch	1/2-4
公称压力 PN	Bar	16-40
	Class	150-300
温度	°C	-50~600
	°F	-58~1112
baulange		DIN 3202
face to face		ANSI B 16.10

型号: 90 00 多通球阀、><

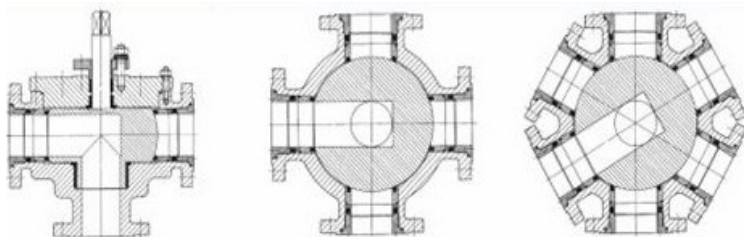

直 径 DN	mm	25-100
	inch	1/2-4
公 称 压 力 PN	Bar	16-40
	Class	150-300
温 度	℃	-50~600
	°F	-58~1112
baulange		DIN 3202
face to face		ANSI B 16.10

型号: 100 00-110 00 120°球阀、>可有可无重叠<

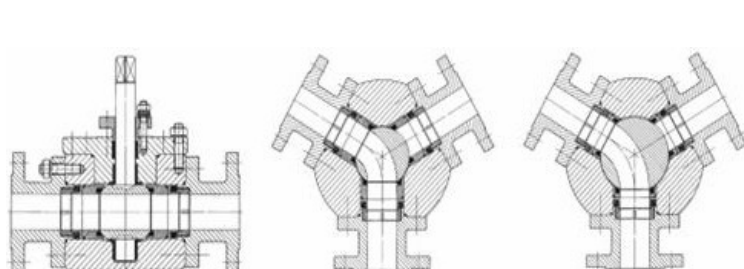

直 径 DN	mm	25-100
	inch	1/2-4
公 称 压 力 PN	Bar	16-160
	Class	150-900
温 度	℃	-50~600
	°F	-58~1112
baulange		DIN 3202
face to face		ANSI B 16.10

DKM 输出球阀---介质为颗粒状球阀


例子:

1、输出阀 DN 200/350 PN 16 with flushing connections	2 、 介 质 为 颗 粒 状 输 出 阀 DN 250/400 PN 16 带有加热套和金属底座

	
3、底部出口介质为颗粒状球阀 DN 200/350 PN 16	4、底部出口球阀 1. NPS 10x16 Class 150 RF
	
5、（容器）出口球阀 DN 250/350 PN 10 with flushing connections	

DKM 进样阀

例子:

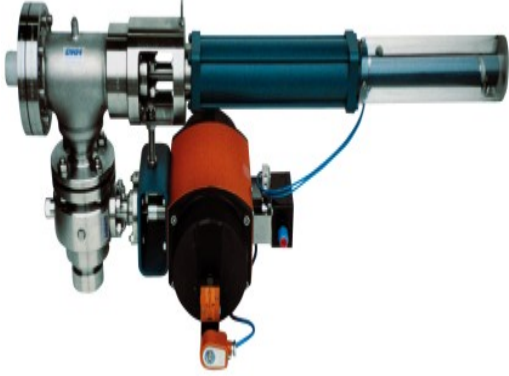	
1、进样阀 有焊接接口	2、进样阀
	
3、进样阀合并	3、进样阀合并
	
4、进样阀，无死空间，。。。	

DKM 特殊装置 I

例子:

	
1、一前一后球阀	2、配量阀
	
3、高压球阀, PN320, 金属底座	4、高压球阀, PN450
	
5、高压球阀, PN10	